

IT(RMS)		10A
VDRM/VRRM	GS10F10B-600	600V
	GS10F10B-800	800V
VTM		1.4V

FEATURES

IT(RMS): 10A

VGT: 1.3V

VDRM VRRM: 600~800V

APPLICATIONS

Heater Control

Motor Speed Controller



Washing machine

Vacuums


Solid state relay

General purpose motor controls


General purpose switching

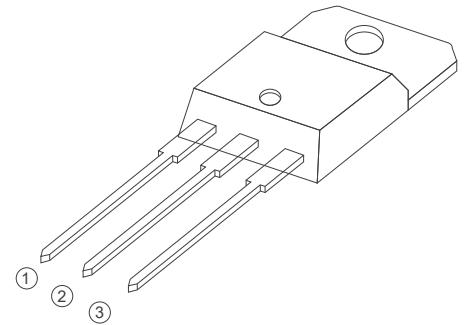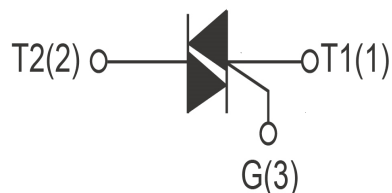


TO-220B Non-Insulated



TO-263

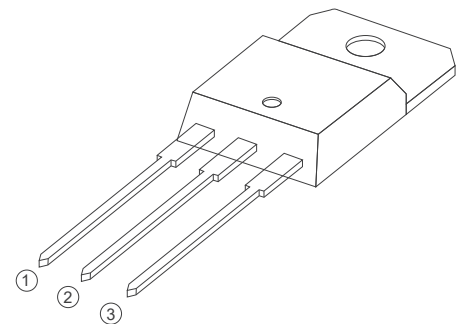

TO-220A Insulated

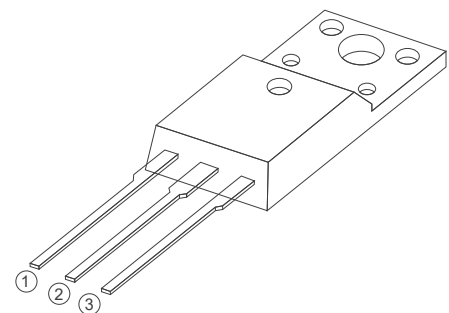

TO-220F Insulated

Absolute Maximum Ratings (T_J=25°C unless otherwise specified)

Symbol	Parameter	Conditions	Ratings
V _{DRM} V _{RRM}	Repetitive Peak Off-State Voltage T _J =25°C	GS10F10B-600	600
		GS10F10B-800	800
I _{T(RMS)}	R.M.S On-State Current	TO-220A T _c =100°C TO-220B T _c =113°C TO-220F T _c =95°C TO-263 T _c =95°C	10
I _{TSM}	Surge On-State Current	T _p =10ms/t _p =16.7ms	100/108
I ² t	I ² t for fusing	T _p =10ms	72
P _{G(AV)}	Average Gate Power Dissipation	T _J =150°C	0.5
I _{GM}	Peak Gate Current	T _J =150°C	2
T _J	Operating Junction Temperature		~40~150
T _{STG}	Storage Temperature		~40~150

Electrical Characteristics (T_J=25°C unless otherwise specified)

Symbol	Parameter	Test Conditions	Value		
			GS10F5B	GS10F10B	GS10F20B
I _{DRM}	Repetitive Peak Off-State Current	T _J =25°C	5		
I _{RRM}	Repetitive Peak Reverse Current	T _J =150°C	2		
V _{TM}	Forward "on" voltage	I _T =16A t _p =380us	≤1.4		
V _{GT}	Gate trigger voltage	V _D =12V ,R _L =30Ω	≤1.3		
di/dt	Critical rate of rise of on-state current	I,II,III F=120Hz,T _J =150°C I _G =2×I _{GT} ,t _r ≤100ns	≥50		
I _{GT}	Gate trigger current	I,II,III V _D =12V R _L =30Ω	≤10	≤20	≤35
I _H	Holding current	I _G =1.2I _{GT}	≤20	≤30	≤45
V _{DG}	Gate non-trigger voltage	ALL V _D =V _{DRM} T _J =150°C	≥0.2		
(dv/dt) _c	Critical-rate of rise of commutation voltage	T _J =150°C V _D =400V (di/dt) _c =-5.0A/mS	5	15	20
dv/dt	Critical-rate of rise of off-state voltage	V _D =67% V _{DRM} ,gate open,T _J =150°C	≥200	≥500	≥1000

FIG1

Maximum power dissipation versus RMS on-state current

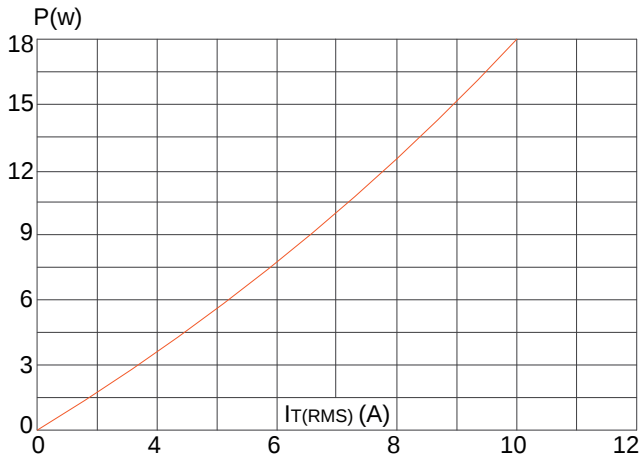


FIG3

Surge peak on-state current versus number of cycles

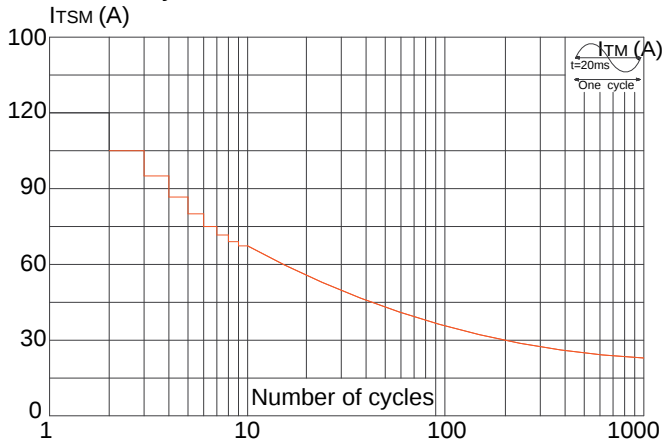


FIG5

Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 20\text{ms}$, and corresponding value of I^2t ($dI/dt < 100\text{A}/\mu\text{s}$)

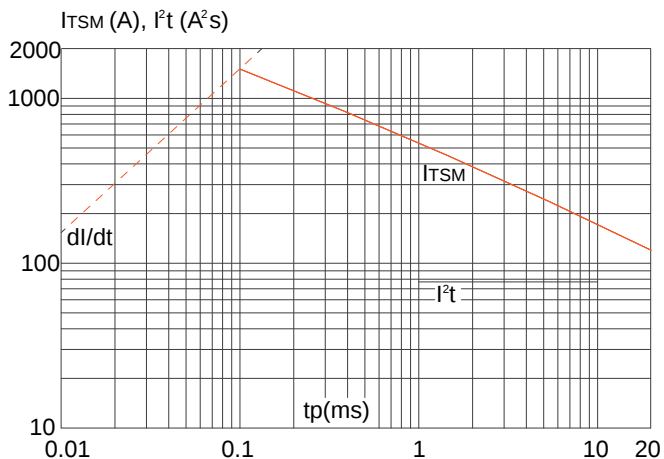


FIG2

RMS on-state current versus case temperature

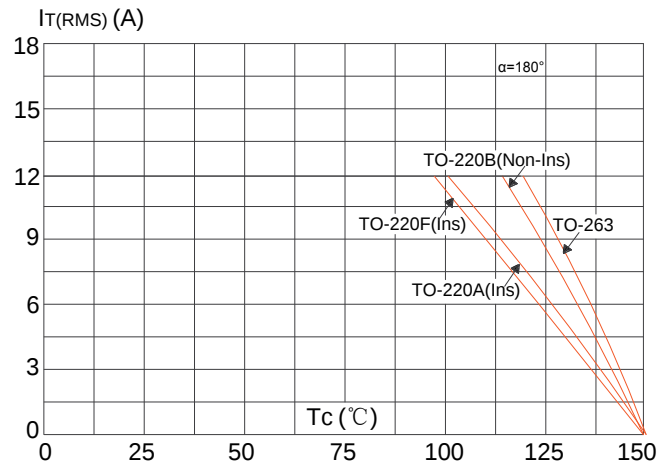


FIG4

On-state characteristics (maximum values)



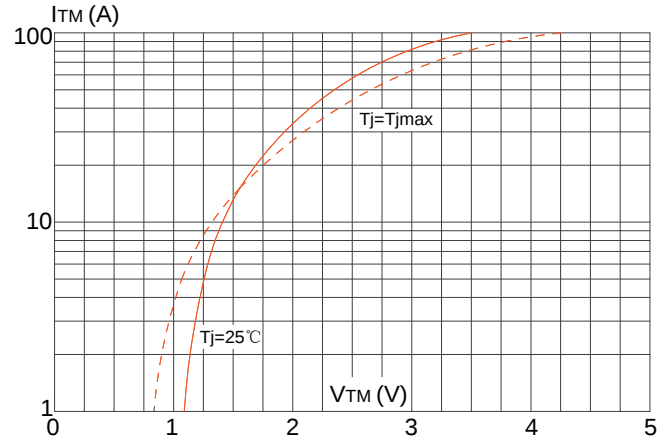


FIG6

FIG.6: Relative variations of gate trigger current, holding current and latching current versus junction temperature

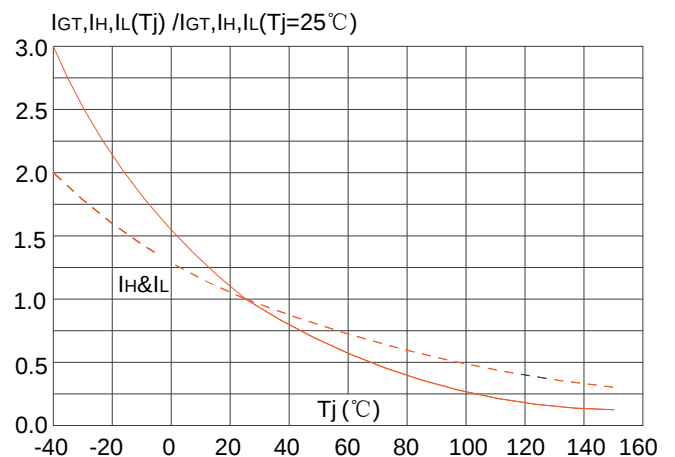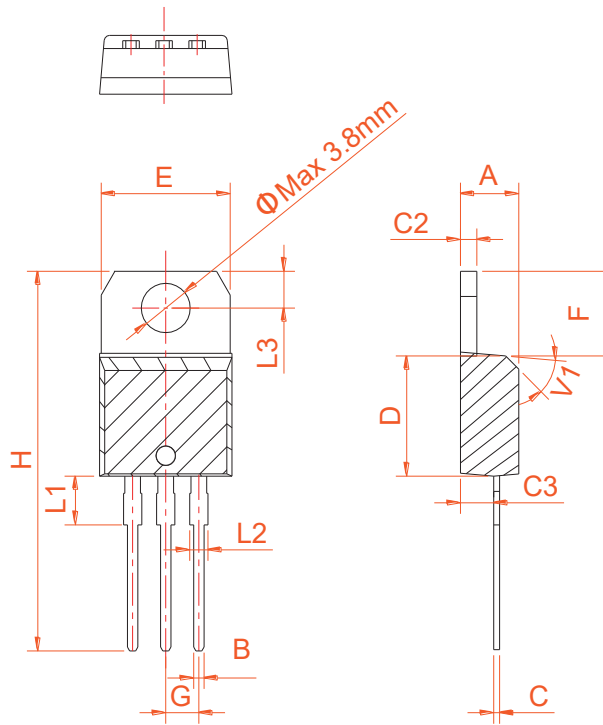


PACKAGE MECHANICAL DATA


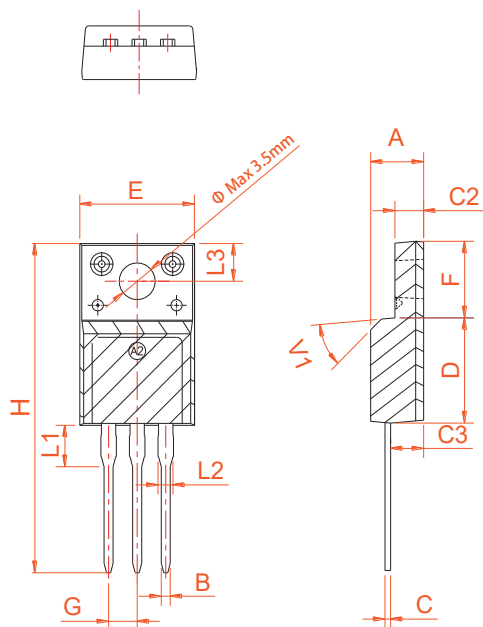
TO-220A Ins

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	0.61		0.88	0.024		0.035
C	0.46		0.70	0.018		0.028
C2	1.21		1.32	0.048		0.052
C3	2.40		2.72	0.094		0.107
D	8.60		9.70	0.339		0.382
E	9.80		10.4	0.386		0.409
F	6.55		6.95	0.258		0.274
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.75			0.148	
L2	1.14		1.70	0.045		0.067
L3	2.65		2.95	0.104		0.116
V1		45°			45°	

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	0.61		0.88	0.024		0.035
C	0.46		0.70	0.018		0.028
C2	1.21		1.32	0.048		0.052
C3	2.40		2.72	0.094		0.107
D	8.60		9.70	0.339		0.382
E	9.60		10.4	0.378		0.409
F	6.20		6.60	0.244		0.260
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.75			0.148	
L2	1.14		1.70	0.045		0.067
L3	2.65		2.95	0.104		0.116
V1		45°			45°	

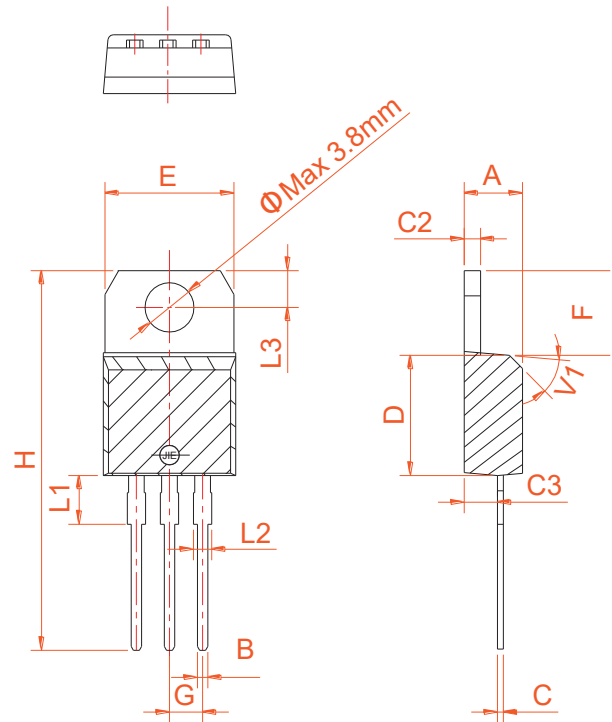


TO-220B Non-Ins

PACKAGE MECHANICAL DATA


TO-220F Ins

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.50		4.90	0.177		0.193
B	0.74	0.80	0.83	0.029	0.031	0.033
C	0.47		0.65	0.019		0.026
C2	2.45		2.75	0.096		0.108
C3	2.60		3.00	0.102		0.118
D	8.80		9.30	0.346		0.366
E	9.80		10.4	0.386		0.410
F	6.40		6.80	0.252		0.268
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.63			0.143	
L2	1.14		1.70	0.045		0.067
L3		3.30			0.130	
V1		45°			45°	

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.7		10.4	0.381		0.409
B	1.31		1.62	0.051		0.063
C	0.65		1.22	0.025		0.048
D	1.15		1.36	0.045		0.053
E	0.62		0.95	0.024		0.037
F	8.75		9.32	0.344		0.366
G	14.75		15.8	0.58		0.622
H	0.32		0.48	0.012		0.018
I	1.18		1.36	0.046		0.053
J	0		0.15	0		0.005
K	4.38		4.86	0.172		0.191
L	4.85		5.23	0.19		0.205

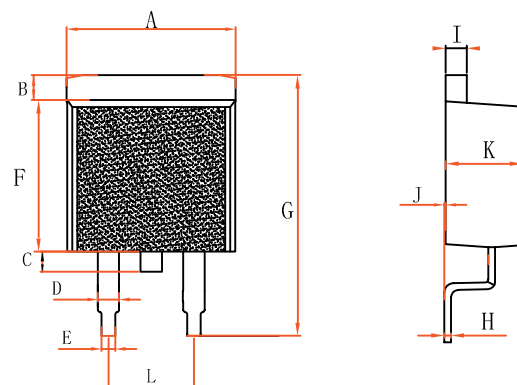

T0-263